

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/032563 A2**

(51) International Patent Classification<sup>7</sup>: **H04Q 11/04**

(21) International Application Number:  
PCT/GB2003/004114

(22) International Filing Date:  
25 September 2003 (25.09.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
200202264 3 October 2002 (03.10.2002) ES  
200300915 16 April 2003 (16.04.2003) ES

(71) Applicant (for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only): **TYCO ELECTRONICS RAYCHEM SA** [ES/ES]; Ctra. Antigua de Francia, 28108 Alcobendas Madrid (ES).

(71) Applicant (for MG only): **TYCO ELECTRONICS UK LTD** [GB/GB]; Faraday Road, Dorcan, Swindon, Wiltshire SN3 5HH (GB).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **ARIAS, Juan, Tomas** [ES/ES]; Calle Valencia no. 51, 28100 Alcobendas Madrid (ES).


(74) Agent: **JAY, Anthony, William**; Tyco Electronics UK Ltd, European Patent Department, Faraday Road, Dorcan, Swindon, Wiltshire SN3 5HH (GB).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE,

[Continued on next page]

(54) Title: **METALLIC TEST ACCESS FOR XDSL CONNECTORS**

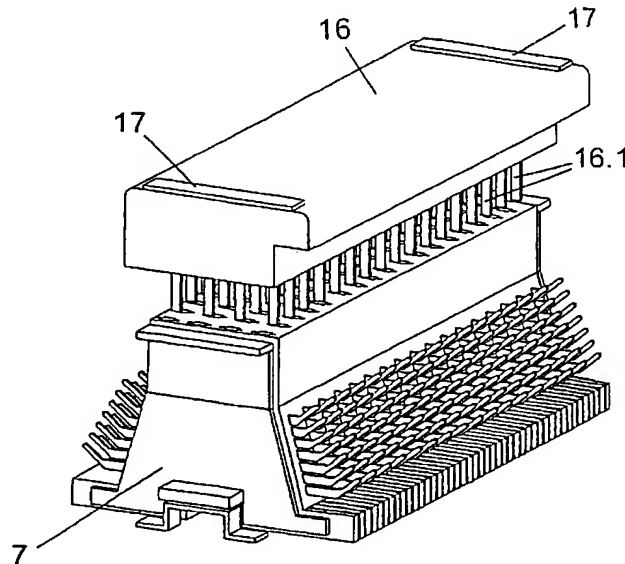

(57) Abstract: Connection architecture which makes it possible to obtain metal contact of the combined voice and data signals, which can subsequently be monitored by a test rack, without needing to disconnect or reconnect any bridge or cable, for which purpose on the terminal block itself of the intermediate distributor, or of the vertical distribution frame, there is a metal port block. Further improvements consist of establishing the metallic access to the intermediate distribution frame (7) by a connecting block (16) with which a plurality of boards (16') are associated, vertically arranged in array, each one of which incorporates its relays or associated electronics, to extract and supply information to a test table, each board (16') having pins (19) to couple with the cavities of the distribution frame.

WO 2004/032563 A2



BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU,  
IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Declaration under Rule 4.17:**

— *of inventorship (Rule 4.17(iv)) for US only*

**Published:**

— *without international search report and to be republished upon receipt of that report*

## METALLIC TEST ACCESS FOR xDSL CONNECTORS

The present invention relates both to the connection architecture of xDSL networks which have a metal port, and to the terminal block or connection block which is necessary in order to obtain this architecture.

In order to provide a high-speed data transmission service, for example via the ADSL (Asynchronous Data Subscriber Line) or in general xDSL, it is necessary to combine or separate the voice signal, which is transmitted by the switching exchange, and the high-speed data signal xDSL, which is supplied by the digital subscriber line access multiplexer (DSLAM), by means of a filter or splitter which adds or separates the signals, according to whether they are going towards the subscriber or are coming from the subscriber.

The object of the present invention is to develop a connection architecture for xDSL networks, such that the said architecture provides the possibility of having metal ports, i.e. ports which make it possible to carry out inspection of the lines either individually or jointly by means of a test rack, all with the minimum number of modifications, and without needing to alter the wiring which the existing structures have.

A further object of the present invention is to develop a terminal block which makes it possible to obtain the signals, so that they can be conveyed to a test rack.

The present invention thus comes within the scope of telephony, and more specifically that of connection systems for xDSL networks, as well as that of the means which are necessary in order to form these connections.

As previously stated, in order to provide a high-speed data service, for example ADSL (Asynchronous Data Subscriber Line), it is necessary to combine the voice signal obtained from the switching exchange with the high-speed signal xDSL provided by the Digital Subscriber Line Access Multiplexer (DSLAM), i.e. the equipment which is responsible for providing the access to high-speed lines. This adding or separation is carried out by means of a filter or splitter, which is normally installed together with the DSLAM in the same electronic component box.

One of the problems encountered according to the previous configurations is that of being able to provide a metal port which makes it possible to convey the combined signal to a test rack, which makes it possible to determine the state both of the subscriber loop and of the DSLAM.

5

There have been various attempts to design architectures which assist obtaining of the metal contacts, one of which is based on the use of an additional terminal block disposed on an independent rack of the intermediate distributor, to which rack there is transmitted the combined voice and xDSL signal which is obtained from the DSLAM, before it reaches the intermediate distributor. This solution has the disadvantage that the wiring has to be both disconnected and reconnected, which presupposes a high cost.

Another solution consists of adding to the terminal block of the intermediate distributor the terminal block which makes it possible to obtain the metal contacts, and in this case it would be necessary to rewire the bridge for the combined voice and data signal, another bridge needing to be established between the terminal block of the intermediate distributor and the new terminal block, to make it possible to obtain the metal contacts. Furthermore, another disadvantage of the addition of the terminal blocks with the metal contacts is the fact of requiring twice the space occupied on the intermediate distributor.

20

The object of the present invention is thus to eliminate the aforementioned disadvantages by providing a new connection architecture for xDSL networks which have a metal port, wherein it is not necessary to disconnect and reconnect the wiring, thus making it possible to obtain quickly and completely the metal port for all the lines, without using extra space on the intermediate distributor, and wherein it is possible to use the systems already in place without needing to make any modifications to them.

The present invention provides connection architecture for xDSL networks with a metal port and terminal block which is necessary for this purpose, having a configuration which makes it possible to have a metal port for each line without needing to disconnect or reconnect the wiring. For this purpose, the architecture has a horizontal terminal block to which there is conveyed the voice signal obtained from switching exchange. From this terminal block and by means of a bridge, the said voice signal continues to reach the intermediate distributor, and from there proceeds via a new cable to the assembly formed by the filter and the

30

DSLAM. The terms "horizontal", "intermediate", and "vertical" as used herein in the context of terminal/distribution blocks/frames and the like are believed to be well understood by persons familiar with the kind of telecommunications equipment to which the present invention generally relates.

5

The DSLAM is the Digital Subscriber Line Access Multiplexer which is responsible for supplying the high-speed digital signal xDSL. The filter or splitter is responsible for adding or separating the voice signal to/from the high-speed signal xDSL.

10 For the purpose of obtaining the metal port in its own terminal block of the intermediate distributor, the metal port block is connected to this terminal block, for which purpose the metal port block has some projecting contacts which are disposed such that they make contact on the necessary signals. The projecting contacts which the metal port block has are disposed such that they face the cavities provided in the contacts for cut-off and testing of  
15 the combined voice signal plus the high-speed signal xDSL. This does not eliminate the possibility of these contacts being disposed such that they permit access to the voice signal. The contacts with which the terminal block of the intermediate distributor are provided are of the cut-off and testing type, which makes it possible to place the metal port block in series.

20

The metal contact blocks can be connected to one another by means of a bus which serves all of them, such that the signals of the metal contact blocks are conveyed to the test rack by means of a single bus. It is also possible for the metal contact blocks to be designed such that instead of connection taking place to the intermediate distributor, it takes place to the  
25 vertical distributor, to which there is transmitted the combined voice and data signal, such that on some occasions there will be only the voice signal, and on others there will be both signals.

30

The remainder of the configuration consists of the bridge, which conveys the combined voice and data signal, and which extends between the intermediate distributor and the vertical terminal block, and then accesses there a filter which separates the signal once again, to reach the telephone or the computer of the user.

In order to further illustrate the present invention, and for the purpose of assisting understanding of its characteristics, reference is made to the accompanying drawings, which are provided by way of non-limiting example representing preferred aspects of the invention.

5

Figure 1 (Prior Art) shows a known connection architecture for xDSL networks, with the metal contact required.

Figure 2 (Prior Art) shows a similar known architecture, in which the metal port takes the form of a rack outside the intermediate distributor.

10 Figure 3 (Prior Art) shows a similar known architecture, in which the metal port takes the form of an additional terminal block which is disposed adjacent to the terminal block of the intermediate distributor.

Figure 4 shows a preferred form of the present invention.

15 Figure 5 shows an elevated, plan and profile representation of a block for obtaining the metal port signal disposed on the terminal block of the intermediate distributor.

Figure 6 shows the previous representation in perspective.

Figure 7 shows two metal port blocks aligned and connected to one another.

Figure 8 shows the form the metal port block takes when it is connected to the vertical terminal block.

20

With reference to the drawings, Figure 1 shows how, in known systems, from the switching exchange 1, the voice signal 2 is supplied, and reaches the horizontal terminal block 13, then continues to the intermediate distributor 7, then continues until it reaches the filter or splitter 4, which combines or separates the voice signal 2 and the high-speed signal xDSL 5, which  
25 is provided by the Digital Subscriber Line Access Multiplier (DSLAM) 3 from a network 9, thus providing the combined signal 6 which once again reaches the intermediate distributor 7, and subsequently continues to the vertical terminal block 14. From this vertical terminal block 14 the combined signal passes via a filter 17 which separates the voice signal from the high-speed signal xDSL, which end up respectively in the telephone device 11 or in  
30 computer 12.

In order to determine a point of demarcation and study both ends, it is necessary to take the combined voice and high-speed signal xDSL to a test rack 10. In order to obtain this point

of demarcation, various solutions are known, such as those which are shown in figures 2 and 3, and are described hereinafter.

Figure 2 shows the known architecture in which the metal port 8 consists of a rack which is independent from the intermediate distributor 7, such that, starting with a fixed architecture such as that shown in figure 1, the combined signal 6 is disconnected and is transferred to the metal port 8, such that subsequently, and using another cable, this signal 6.1 reaches the intermediate distributor 7. From the metal port 8 it is conveyed to the test rack 10.

Figure 3 shows the known solution consisting of placing on the intermediate distributor 7 and adjacent to it, the metal port 8, which requires rewiring of the bridge 15 for the combined signal, with the need for a bridge 15.1 between the intermediate distributor 7 and the metal port 8, and another 15.2 from the latter to the vertical terminal block 14. This also presupposes duplication of space in the intermediate distributor.

Figure 4 shows the solution now proposed according to the present invention, wherein, without needing to disconnect or reconnect the wiring, and without taking up more space, it is possible to obtain a metal contact for the lines, simply by placing the metal port block 8 on the terminal block of the intermediate distributor 7.

Figures 5 and 6 show a non-limiting representation of the terminal block of the intermediate distributor, on which there is disposed the block 16 in order to obtain the metal port signal. This block 16 has only the contact walls 16.1 which are necessary, disposed corresponding to the cavities of the pairs for the combined signals, i.e. voice signal plus high-speed signal xDSL. If it is wished to have a metal port for the voice signals, it will be sufficient for the metal contacts 16.1 of the block 16 to be disposed corresponding to the voice signals of the intermediate distributor. It can also be seen that at the ends of the metal port block 16 there are some connectors 17 for connection between the different blocks, by means of a bus.

Figure 7 shows two metal port blocks which are aligned and connected to one another by means of a bus 18, with connection to the test rack by means of a single bus.

Figure 8 shows the form adopted by the metal port block when it is disposed on the vertical terminal block. This block will have the same number of pairs of metal contacts as there are lines to be controlled.

5 Further improvements according to the present invention have the purpose of allowing metallic accesses to be established, i.e. those which permit inspecting the lines from a test table, in the vertical distribution frame i.e. in the distribution frame on the subscriber's side, as well as defining specific connecting blocks adapted to different types of distribution frames.

10 In the invention hereinbefore described, whose object is avoiding wiring operations being carried out in the connection architecture for xDSL lines with metallic access, in order to have the combined signal in a test table which permits knowing the status of both the subscriber loop and the multiplexer (DSLAM) or equipment, it is in one form designed that the metallic access is established on a connecting block, provided with pairs of contacts to  
15 be connected to the pairs of combined signals, i.e. voice plus high-speed xDSL signal, existing in the intermediate distribution frame, of which specific embodiments are described, designed for a specific type of distribution frame. The invention includes the alternative that to establish the metallic access to the test table, said connecting block could be coupled with the vertical distribution frame, i.e. the subscriber side distribution frame, of which specific  
20 embodiments will be hereinafter described.

The further improvements that the present invention now proposes constitute specific solutions relating both to the location of the metallic access unit in relation to the vertical distribution frame, and to specific embodiments of said unit to adapt it to different  
25 distribution frame connecting blocks, i.e. to distribution frames with connecting blocks with different "anatomies".

Specifically, and in accordance with one of the characteristics of the invention, the metallic access service to all the lines with voice, special (voice + data, ISDN, etc) service  
30 and without service, is located in the vertical distribution frame. The existing strips in the distribution frames (7-14) may have their protection in the patch and test point or in the separate area of this patch and test point.

In those strips wherein the patch and test point is separate from the protection point,



the metallic access is established through the side where said protection point is positioned. The metallic access forms part of an essentially prismatic-rectangular or cartridge housing which contains the classic relays and associated electronics, joining the metallic access block and the and the cartridge that contains it, with the aid of a connector, there also being  
5 connectors for the bus, which link the different metallic accesses, in the cartridge.

In those strips wherein the patch and test point coincides with the protection point, the latter receive, in said point, a cartridge which, as in the previous case, has the relays and associated electronics, a cartridge which, in this case, is provided with an optional folding  
10 access lid.

Preferred embodiments of these further improvements will now be described by way of example with reference to the accompanying drawings, wherein

Figure 9 shows the connection architecture for xDSL networks with the  
15 metallic access established in the vertical distribution frame.

Figure 10 shows a schematic perspective representation of a connecting block adapted to the corresponding distribution strip.

Figure 11 also shows a perspective view of a detail of one of the connecting  
20 boards included in the cartridge of the previous figure.

Figure 12 shows another schematic, perspective representation and another solution for the metallic access cartridge, adapted for another type of distribution block.

Figure 13 shows, according to a similar representation to that of figure 4, another embodiment for the metallic access cartridge, corresponding to another type of distribution strip, and, as in the above case appears with its housing open and partially  
25 sectioned.

Referring to Figures 9 to 13, and particularly to figure 9, it can be observed how a voice signal is supplied (2) from the switching exchange (1) to a horizontal distribution frame (13) from where said signal continues until an intermediate distribution frame (7),  
30 from where it continues to the filter or splitter (4) which joins or separates the voice signal (2) and the high-speed xDSL signal (5) provided by the digital subscriber line access multiplexer (DSLAM) (3) from a network (9), obtaining the combined signal (6) that again passes to the intermediate distribution frame (7), from where it continues to the vertical distribution frame (14), after which the combined signal passes through a filter (17) where

the voice signal and the high-speed xDSL signal are separated, said signals ending in the telephone apparatus (11) and in the computer (12). The metallic access (8) located in the vertical distribution frame (14) gathers the information from said distribution frame and supplies it to the test table (10).

5

Turning to figures 10 and 11, a different type of distribution block 7 (or 14) is represented, essentially characterized in that the protection point is separated from the telephone pairs connection and the patch and cut area, the connecting block for data gathering forming a block (16) whereto a plurality of boards (16') can be coupled arranged in array in the form of cartridges, one of which is represented in detail in figure 3, boards (16') provided with the corresponding connecting points (19) of the protection connection which, in turn, are linked to the block (16) by their respective connectors (20), each board having the corresponding, relays (21) and associated electronics. As can be easily verified in view of figure 10, these boards (16') can be easily coupled with and uncoupled from the distribution frame (7) or (14) by simple vertical displacement. Furthermore, the connecting block (16) incorporates connectors (17) at the ends thereof for the bus (18) which permits the blocks to interconnect.

In the embodiment in figure 12, the distribution block 7 (or 14) adopts a generally prismatic-rectangular shape, and the boards (16') are arranged on a block (16) aided by an upper, folding lid (22), said boards (16') having the same connecting points (19) and the same connectors (20), whilst the cartridge (16) also has similar connectors (17) for the cartridge interconnection bus.

Finally, figure 13 represents the specific solution designed for the connecting block (16) corresponding to a distribution block 7 (or 14) hereinbefore described, and it is observed how, in this case, the cartridge (16) also has a folding lid (22) to access the boards (16'), with the relays and associated electronics, established therein, also vertically.

The materials, form, size and arrangement of the elements can vary, provided that this does not affect the substance of the invention.

CLAIMS

1. Connection architecture for xDSL networks with a metal port, wherein the voice signal (2) is obtained from the switching exchange (1), reaches the horizontal terminal block (13), continues to the intermediate distributor (7) and from there to the assembly formed by the filter or splitter (4) and the DSLAM (3), which is responsible for supplying the high-speed digital signal xDSL (5) from a network (9), there being emitted from this assembly a combined voice and data signal (6) which reaches the intermediate distributor (7), and is transmitted once more to a vertical terminal block (14) and a subsequent separation filter (17), thus reaching the user either on the telephone (11) or on the computer (12), characterised in that the intermediate distributor (7) or the vertical terminal block (14) has a connection element which has cut-off and test contacts, and the metal port block is disposed on the connection element itself of the intermediate distributor (7) or on the vertical terminal block (14), thus making it possible to obtain the metal port signal which is subsequently conveyed to the test rack (10), without needing to disconnect or reconnect any bridge or cable of this architecture.

2. Terminal block for use in the connection architecture according to claim 1, characterised in that it makes it possible to obtain the metal port by being disposed on the terminal block of the intermediate distributor (7), such that the said terminal or block (16) has on its base a set of pairs of contacts (16.1), which are disposed corresponding to the cavities which are provided in the terminal block of the intermediate distributor, corresponding to the contacts which transmit the combined voice signal and high-speed signal xDSL.

3. Terminal block according to claim 2, characterised in that the pairs of contacts (16.1) of the terminal or port block (16) are disposed corresponding to the cavities corresponding to the contacts for the voice signal which exist on the terminal blocks of the intermediate distributor (7).

4. Terminal block according to claim 1, characterised in that it makes it possible to obtain the metal port by being disposed on the vertical terminal block (14), such that the said terminal or block (16) has on its base a set of pairs of contacts (16.1) which are disposed corresponding to the cavities which exist in the terminal block of the vertical distributor

(14), corresponding to the contacts of the combined signal.

5. Terminal block according to any preceding claim, characterised in that it has the means necessary to be connected to the adjacent terminal blocks by means of a bus.

5

6. Connection architecture according to claim 1 incorporating a terminal block according to any of claims 2 to 5.

7. Connection architecture according to claim 1, characterized in that the connecting block (16), through which the metallic access to the intermediate distribution frame (7) or the vertical distribution frame (14) is made, is materialized in a plurality of boards (16'), containing their corresponding components such as relays and associated electronics, each one of these boards having contact pins or plugs on their lower edge (19), to be housed in the cavities for the patch and test or protection area of the distribution frame (7-14) strip.

15

8. Connection architecture according to claim 7, characterised in that said boards (16') also have connectors (20) for interconnection thereof and/or for connection to the cartridge (16) in their array.



9. Connection architecture according to claim 8, which also has connectors (17) to interconnect the cartridges in array, with the aid of buses (18).

10. Connection architecture according to any of claims 7 to 9, characterized in that said boards (16') are configured as cartridges optionally having lids, which, when coupling with and uncoupling from the housing (16) of the cartridge, configure a closed outer surface which protects its inner components.

11. Connection architecture according to any of claims 7 to 10, characterized in that said boards are laminated, and/or incorporate their components on one or both sides, and/or are protected within a housing defined by the cartridge, optionally having an upper or folding lid.

\* \* \* \* \*

1/8

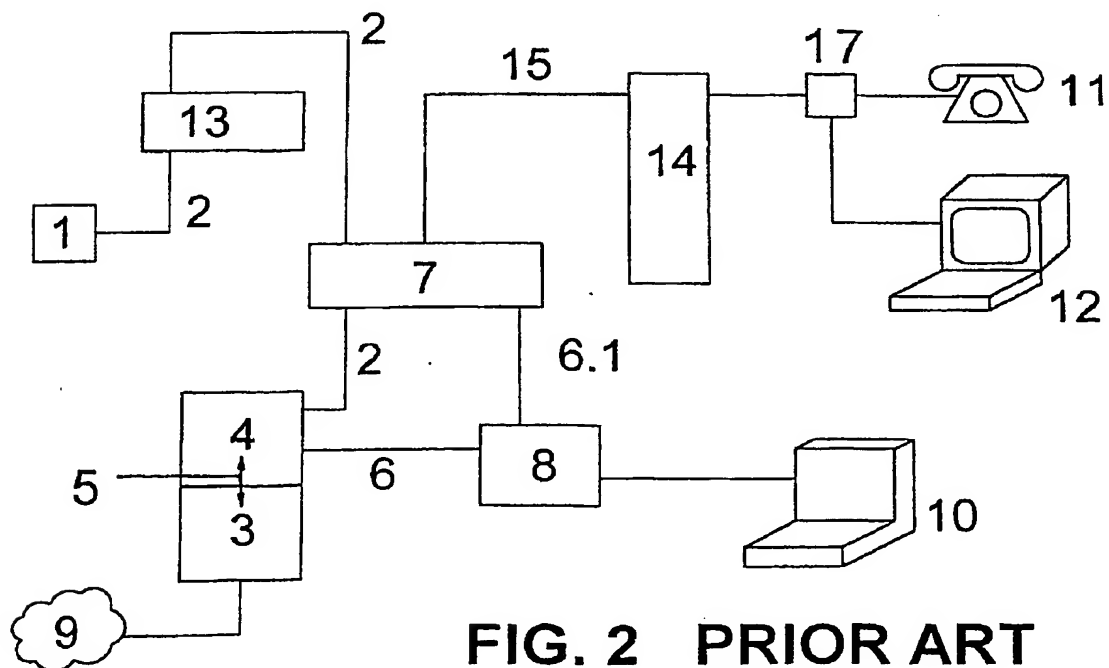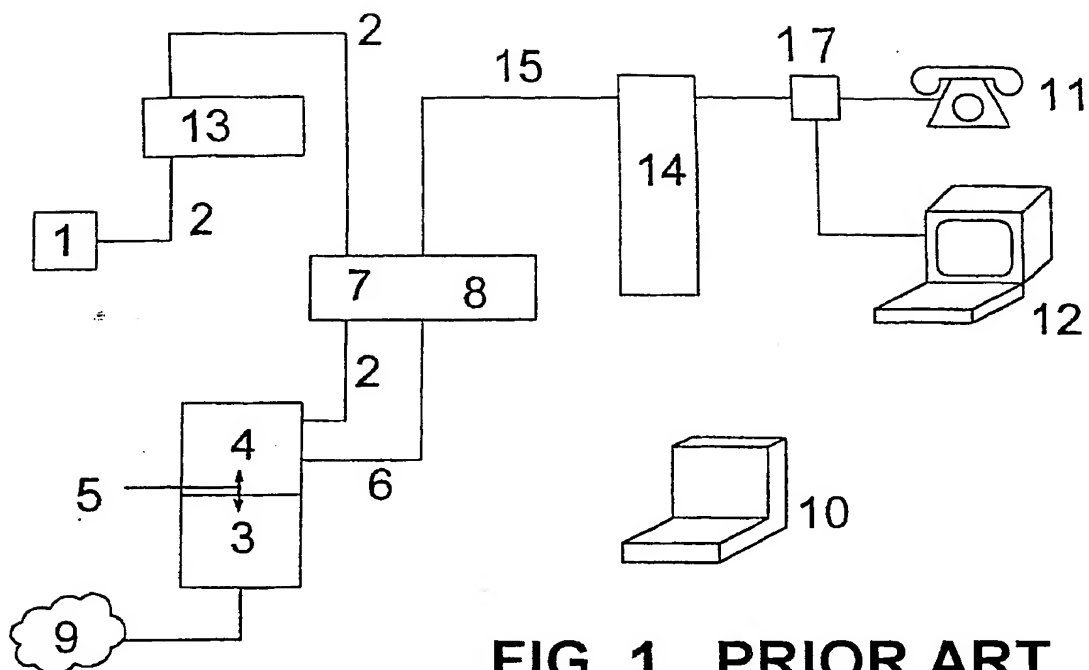

2/8

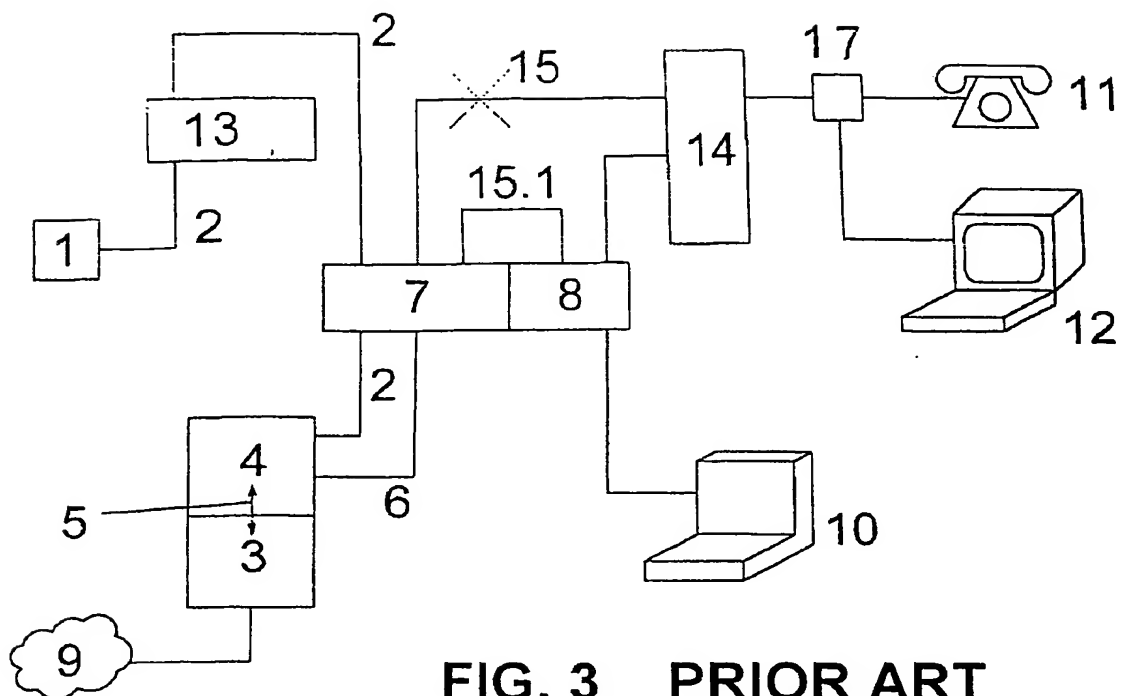


FIG. 3 PRIOR ART

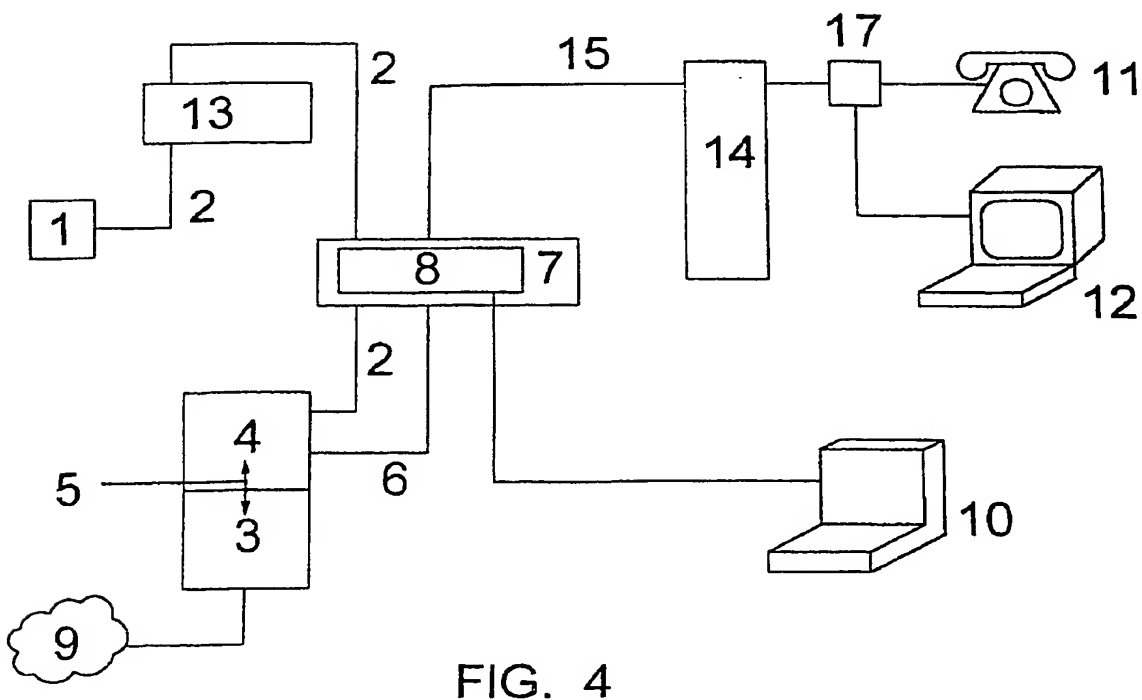


FIG. 4

3/8

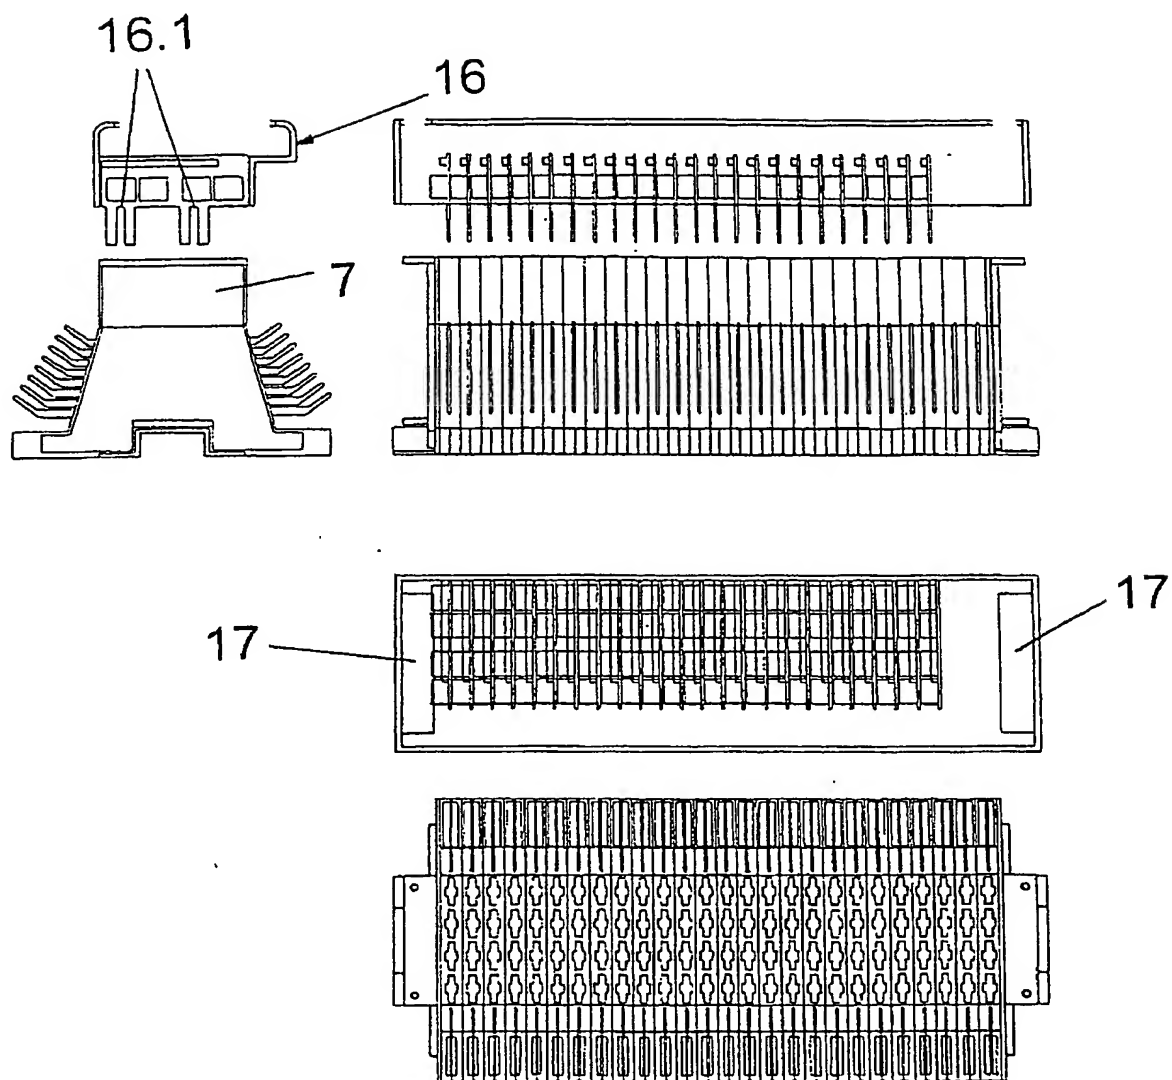


FIG.5

4/8

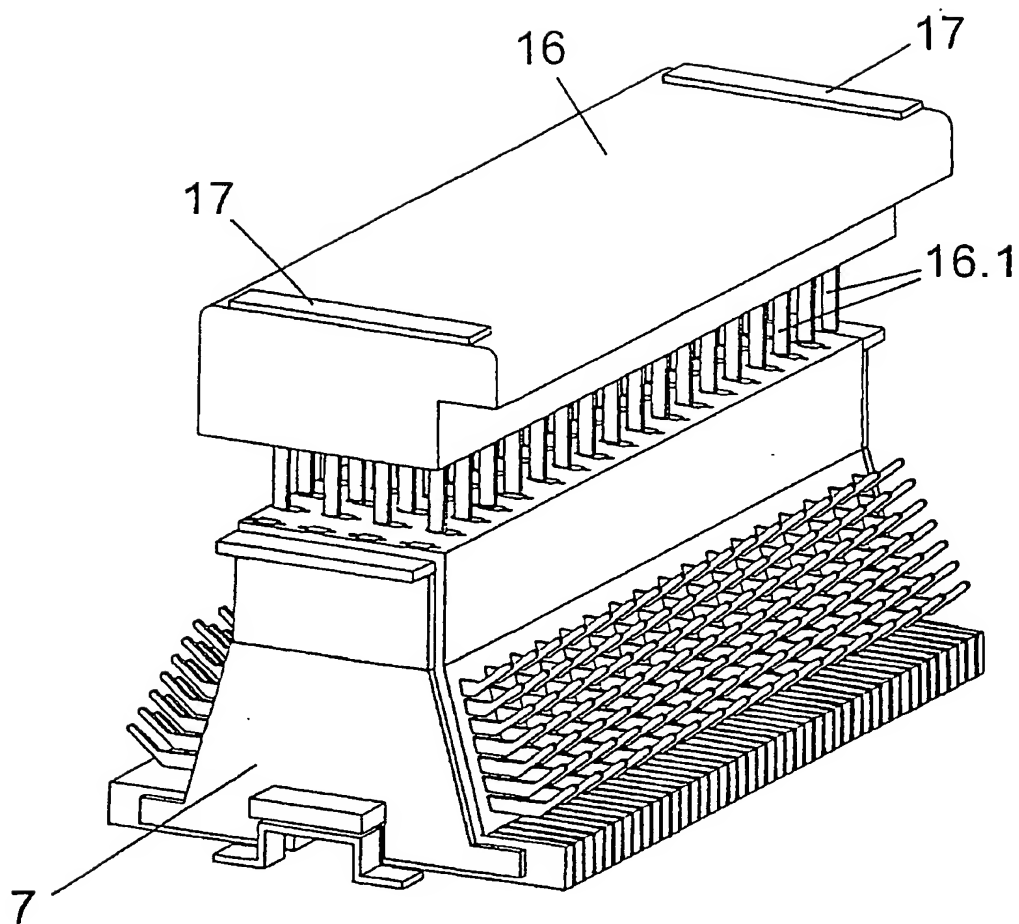


FIG.6



5/8

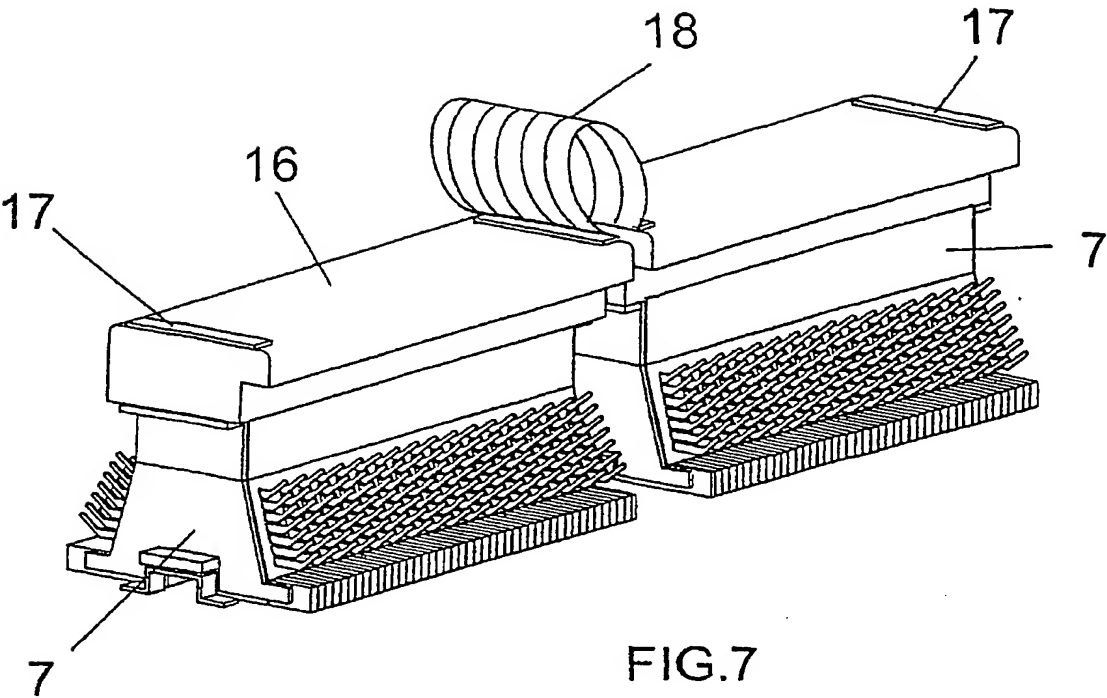


FIG. 7





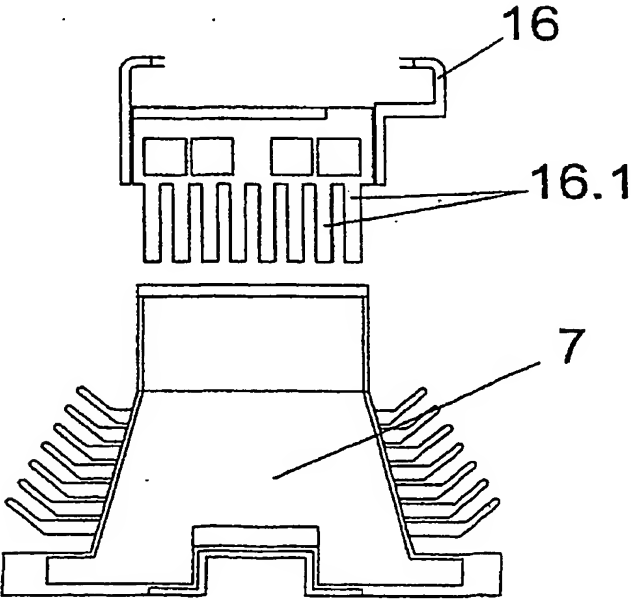


FIG. 8


6/8

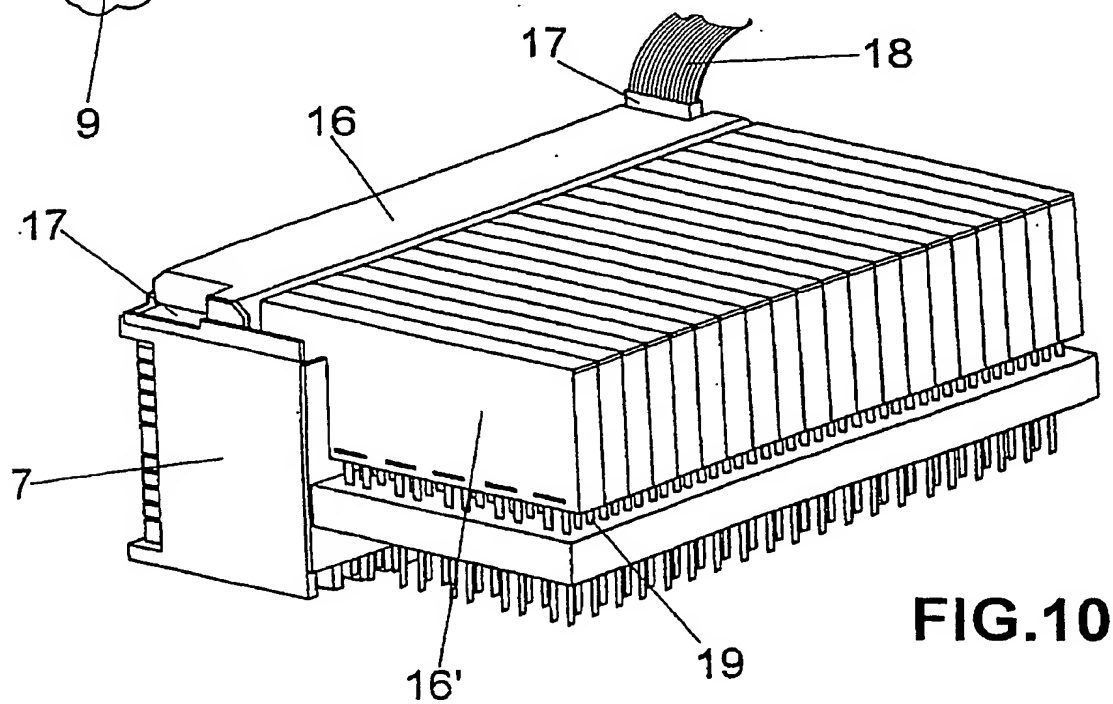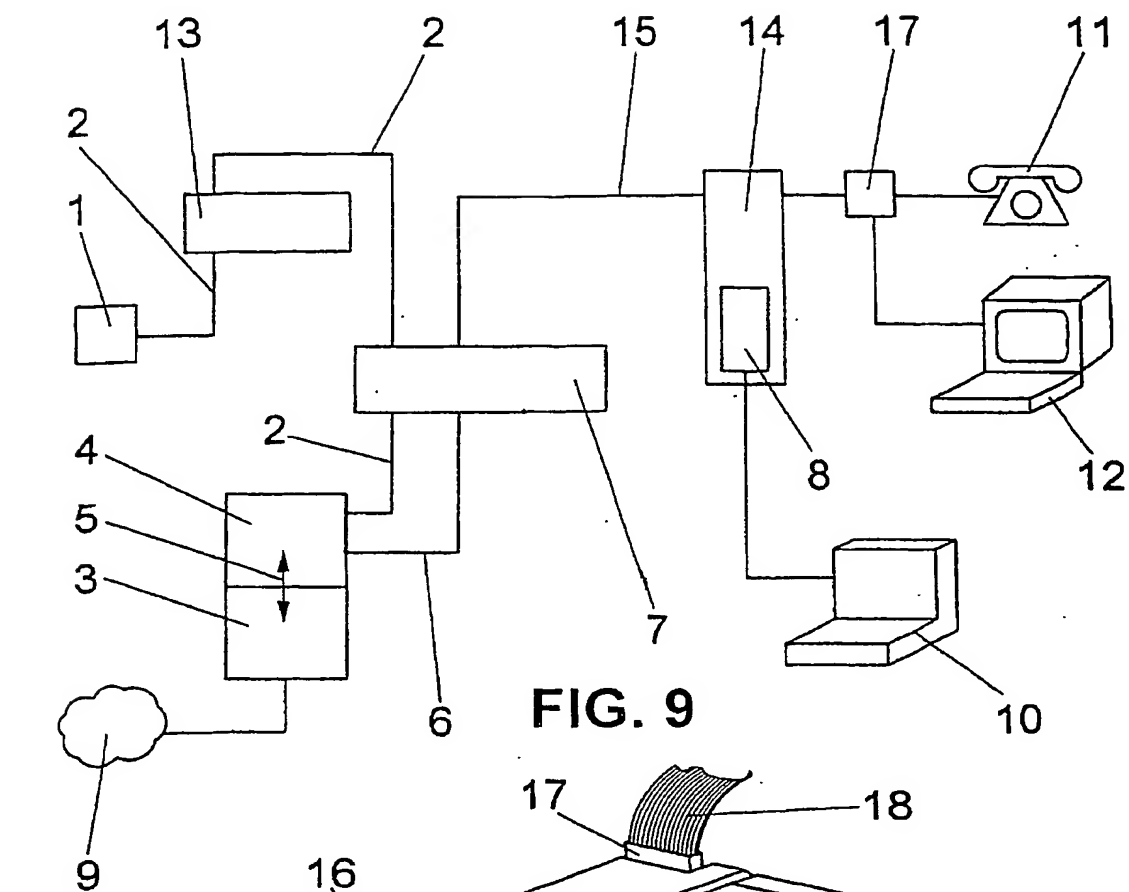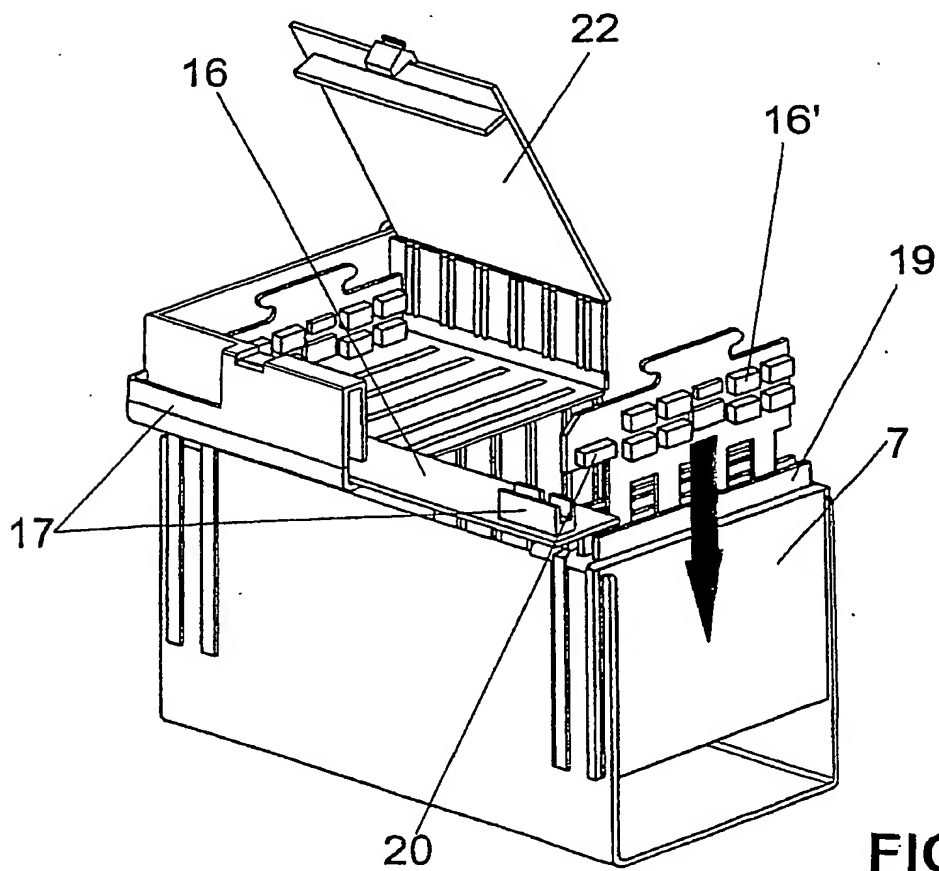

7/8

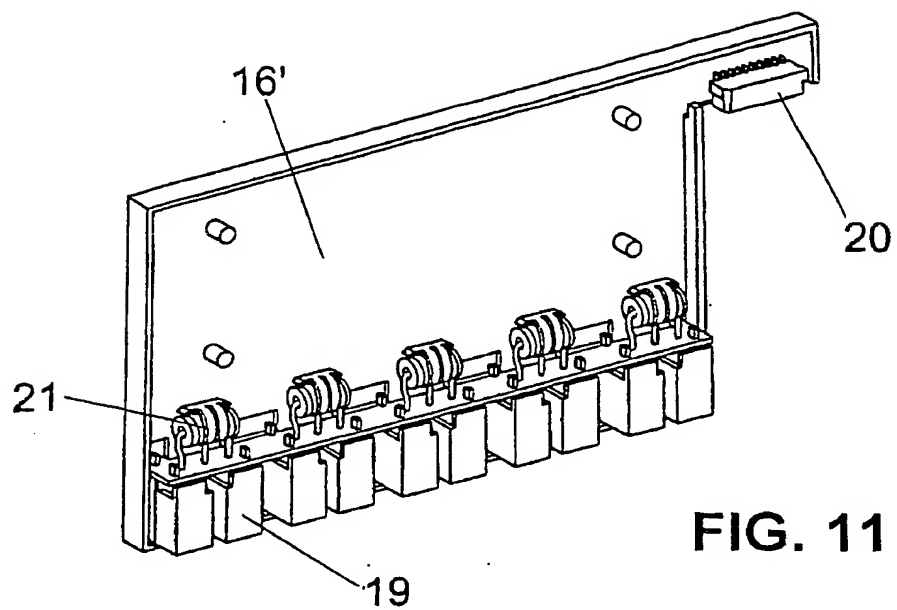

8/8

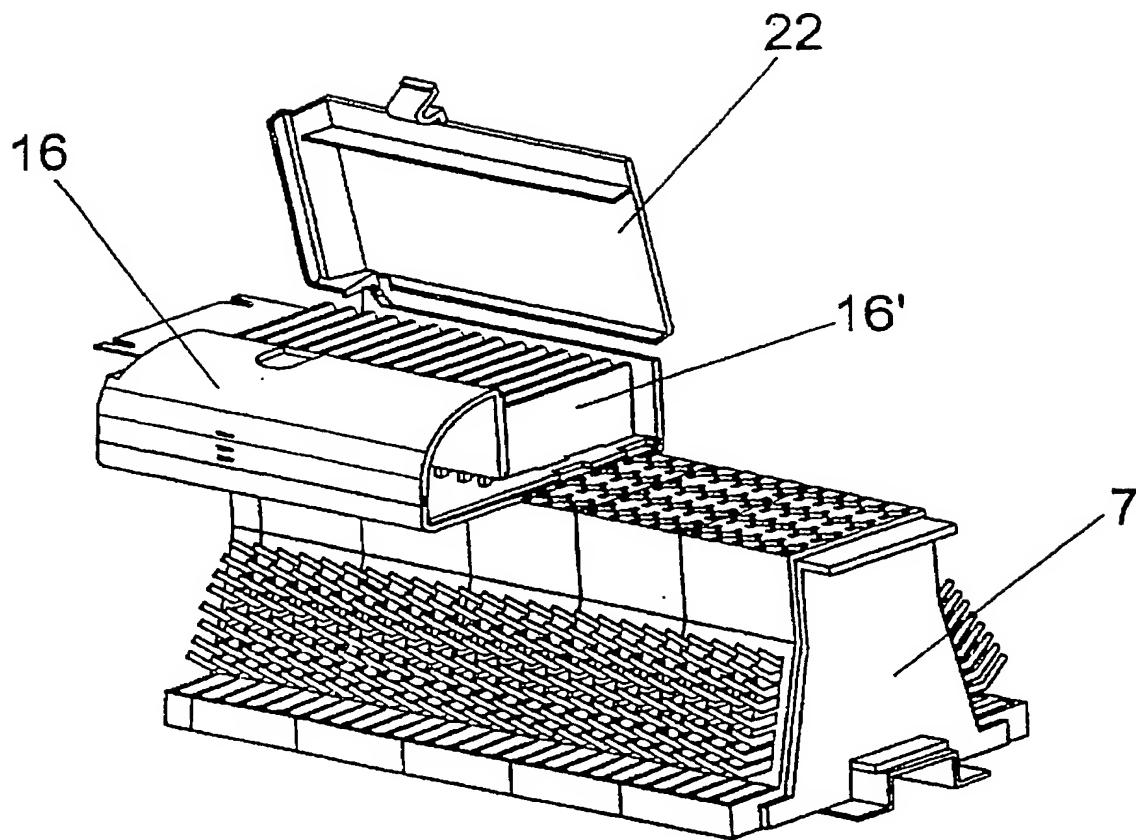

**FIG. 13**

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
15 April 2004 (15.04.2004)

PCT

(10) International Publication Number  
**WO 2004/032563 A3**

(51) International Patent Classification<sup>7</sup>: **H04Q 11/04**,  
H04M 3/30

*SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW only*: **TYCO ELECTRONICS RAYCHEM SA** [ES/ES]; Ctra. Antigua de Francia, 28108 Alcobendas Madrid (ES).

(21) International Application Number:  
PCT/GB2003/004114

(71) Applicant (*for MG only*): **TYCO ELECTRONICS UK LTD** [GB/GB]; Faraday Road, Dorcan, Swindon, Wiltshire SN3 5HH (GB).

(22) International Filing Date:  
25 September 2003 (25.09.2003)

(25) Filing Language: English

(72) Inventor; and

(26) Publication Language: English

(75) Inventor/Applicant (*for US only*): **ARIAS, Juan, Tomas** [ES/ES]; Calle Valencia no. 51, 28100 Alcobendas Madrid (ES).

(30) Priority Data:  
200202264 3 October 2002 (03.10.2002) ES  
200300915 16 April 2003 (16.04.2003) ES


(74) Agent: **JAY, Anthony, William**; Tyco Electronics UK Ltd, European Patent Department, Faraday Road, Dorcan, Swindon, Wiltshire SN3 5HH (GB).

(71) Applicant (*for AE, AG, AL, AM, AT, AU, AZ, BA, BB, BE, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CY, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, FR, GB, GD, GE, GH, GM, GR, HR, HU, ID, IE, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,*

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,

[Continued on next page]

(54) Title: METALLIC TEST ACCESS FOR XDSL CONNECTORS

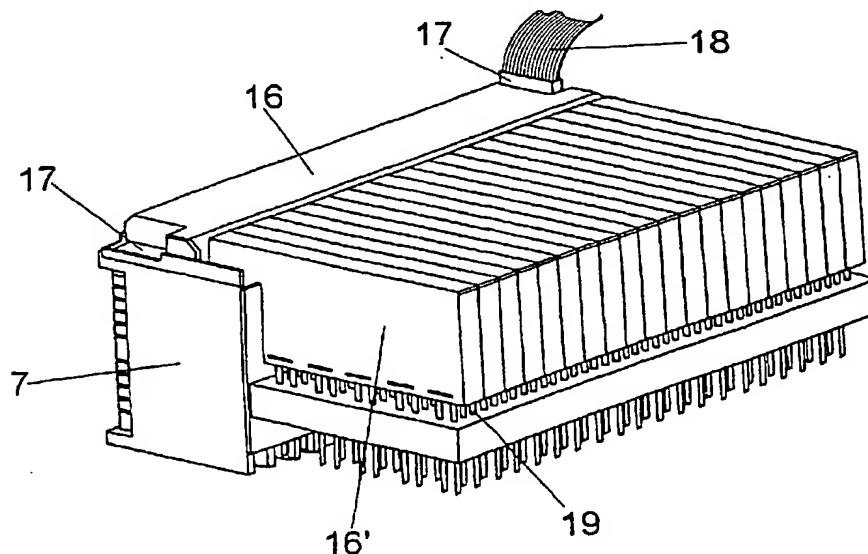

(57) Abstract: Connection architecture which makes it possible to obtain metal contact of the combined voice and data signals, which can subsequently be monitored by a test rack, without needing to disconnect or reconnect any bridge or cable, for which purpose on the terminal block itself of the intermediate distributor, or of the vertical distribution frame, there is a metal port block. Further improvements consist of establishing the metallic access to the intermediate distribution frame (7) by a connecting block (16) with which a plurality of boards (16') are associated, vertically arranged in array, each one of which incorporates its relays or associated electronics, to extract and supply information to a test table, each board (16') having pins (19) to couple with the cavities of the distribution frame.



RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,  
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

**Declaration under Rule 4.17:**

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

(88) Date of publication of the international search report:

27 May 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 03/04114

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 H04Q11/04 H04M3/30

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, IBM-TDB, INSPEC

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02 47429 A (ADC TELECOMMUNICATIONS INC) 13 June 2002 (2002-06-13) abstract page 7, line 13-24 figure 9	1
A	-----	2-11
A	EP 1 193 958 A (LUCENT TECHNOLOGIES INC) 3 April 2002 (2002-04-03) abstract column 2-3, paragraphs 10,11 claim 1; figure 2	1-11
A	-----	1-11
	WO 01 65816 A (TURNSTONE SYSTEMS INC) 7 September 2001 (2001-09-07) page 6, line 33 -page 7, line 30 figures 3A,3B	
	-----	
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

### \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the International filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the International filing date but later than the priority date claimed

- \*T\* later document published after the International filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

26 March 2004

Date of mailing of the International search report

02/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Gijssels, W

# INTERNATIONAL SEARCH REPORT

Internatio      plication No  
PCT/GB 03/04114

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 1 202 541 A (ALCATEL CANADA INC)  2 May 2002 (2002-05-02)  column 7-9, paragraphs 39-42  claims 1-6; figures 3,4  -----</p>	1-11



# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/GB 03/04114

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 0247429	A	13-06-2002	AU 4170202 A WO 0247429 A1	18-06-2002 13-06-2002
EP 1193958	A	03-04-2002	US 6496566 B1 CA 2357565 A1 CN 1348280 A DE 60101709 D1 EP 1193958 A1 JP 2002247192 A	17-12-2002 29-03-2002 08-05-2002 12-02-2004 03-04-2002 30-08-2002
WO 0165816	A	07-09-2001	US 6574309 B1 AU 4333901 A TW 498675 B WO 0165816 A2 US 2002122539 A1 US 2002131568 A1	03-06-2003 12-09-2001 11-08-2002 07-09-2001 05-09-2002 19-09-2002
EP 1202541	A	02-05-2002	EP 1202541 A2 JP 2002199094 A	02-05-2002 12-07-2002